

## Tinytag View 2 Temperature Logger for Thermistor Probe (-40 to +125°C)

### TV-4020

**Issue 5**  
21st April 2011  
E&OE

Tinytag View 2s are all housed in an attractive IP65 case and have an integral display. All feature high reading accuracy and resolution, large memories, a fast offload speed and a low battery monitor.

Designed to work with an external thermistor probe, the TV-4020 is ideal for recording and displaying temperatures where a fast response time is needed or the place that needs to be monitored is inaccessible. This unit can also measure higher temperatures than the integral sensor versions.



#### Popular Applications

- Chill cabinets and fridges
- Building condition monitoring
- Environmental monitoring
- Pharmaceutical storage



#### Features

- Temperature recorder
- BS EN 12830 Compliant (S; A; 1)
- LCD display of current readings
- 30,000 reading capacity
- High Accuracy
- High Reading Resolution
- Fast Data Offload
- 2 user-programmable alarms
- Low battery monitor
- User-replaceable battery





### Features


<b>Total Reading Capacity</b>	30,000 readings
<b>Memory type</b>	Non Volatile
<b>Display</b>	4 digits + indicators
<b>Display Modes</b>	°C or °F
<b>Display Refresh Rate</b>	Every 2 seconds
<b>Trigger Start</b>	Magnetic Switch
<b>Delayed Start</b>	Relative / Absolute (up to 45 days)
<b>Stop Options</b>	When full After n Readings Never (overwrite oldest data)
<b>Reading Types</b>	Actual, Min, Max
<b>Logging Interval</b>	1 sec to 10 days
<b>Offload</b>	While stopped or when logging in minutes mode
<b>Alarms</b>	2 fully programmable; latching

### Reading Specification

<b>Reading Range</b>	-40 °C to +125 °C (-40 °F to 257 °F)
<b>Sensor Type</b>	10K NTC Thermistor (external probe)
<b>Logger Resolution</b>	0.02 °C or better
<b>Display Resolution</b>	0.1 °C or 0.1 °F
<b>Temperature Stability</b>	0.005 °C/°C Change from 25 °C

### Accuracy

The graph below is the accuracy of the TV-4020 when used with a PB-5001-1M5/3M/5M or PB-5002-1M5/3M/5M probe. Using a different probe may affect the accuracy of the unit.

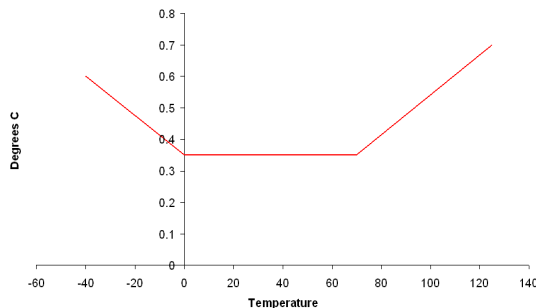

### Notes

**Battery Type** Tekcell SBAA02P;  
SAFT LS14250 or LST14250

The logger will operate with other ½AA 3.6V Lithium (Li-SOCI2) batteries but performance cannot be guaranteed.

**Replacement Interval** Annually

Before replacing the battery the data logger must be stopped.

Data stored on the logger will be retained after a battery is replaced.

The clarity of the display may change at extremes of temperature.

If used at low temperatures the data logger should be allowed to warm to room temperature before it is opened to avoid condensation forming inside the unit.

The IP65 rating is valid only when the unit's connector cap and probe are securely fitted.

### Physical Specification

<b>IP Rating</b>	IP65 splash proof (see notes)
<b>Operational Range*</b>	-30 °C to +70 °C
<b>Case Dimensions</b>	
<b>Diameter</b>	60mm / 2.36"
<b>Length</b>	85mm / 3.35"
<b>Width</b>	77mm / 3.03"
<b>Depth</b>	35mm / 1.38"
<b>Weight</b>	85g / 3oz

\*The Operational Range indicates the physical limits to which the unit can be exposed, not the reading range over which it will record.

### Calibration

This unit is configured to meet Gemini's quoted accuracy specification during its manufacture.

We recommend that the calibration of this unit should be checked annually against a calibrated reference meter.

A UKAS traceable certificate of calibration can be supplied for an additional charge either at the point of purchase, or if the unit is returned for a Service Calibration.

### Approvals

This logger complies to BS EN 12830, in the following categories:

S; A; 1

This equipment complies with part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause any harmful interference, and (2) the device must accept any interference received, including interference that may cause undesired operation.

Gemini Data Loggers (UK) Ltd. operates Quality and Environmental Management Systems which conform to ISO 9001 and ISO 14001. The scope of these systems covers the design, manufacture and servicing of data logging and associated equipment, including software.



### Required and Related Products

To use this data logger you will require one of the following probes:

PB-5001-1M5/3M/5M: Standard Thermistor Probe or  
PB-5002-1M5/3M/5M: Fast Response Thermistor Probe

One of the following pieces of software:

SWCD-0040: Tinytag Explorer software or  
SW-0500: Easyview Pro software

and a

CAB-0007-USB: Tinytag Ultra/Plus/View USB Download Cable

Further related products:

CAB-0007: Tinytag Ultra/Plus/View Serial Download Cable  
SER-9500: Tinytag Data Logger Service Kit  
ACS-5000: Tinytag Alarm Box  
ACS-6000: Trigger Start Magnet